


# WELDON RADIO

Manufactured by Bloch & Gerber Ltd., with which is associated Weldon Electric Supply Co., 46-48 York Street, Sydney, N.S.W.

## WELDON C423P (1940)

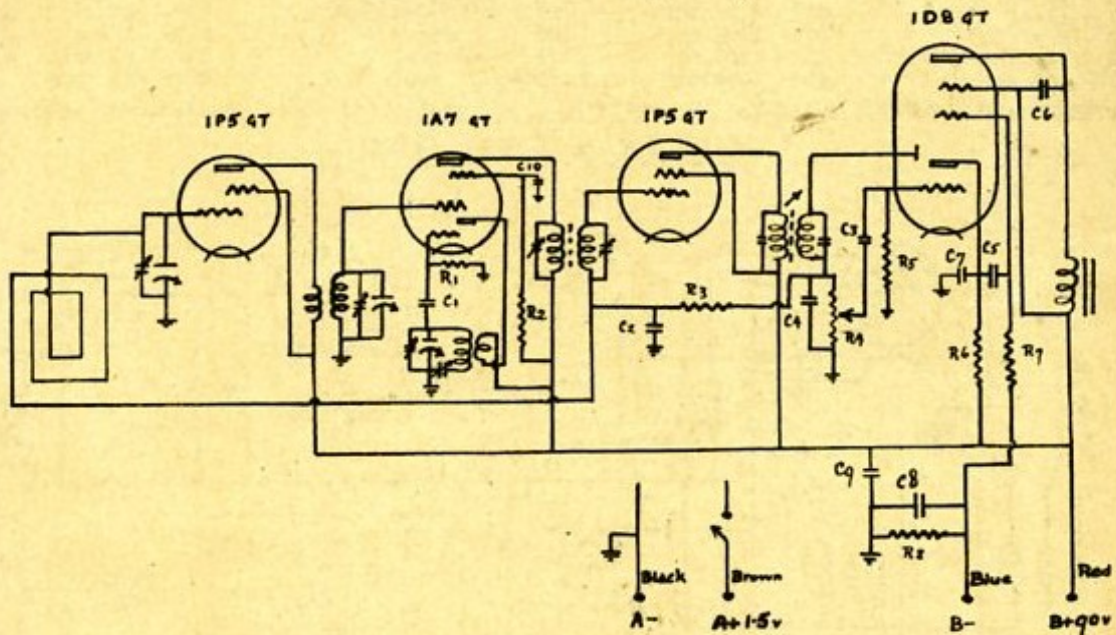

C1 - .0001 mf mica  
C2 - .05 mf paper  
C3 - .005 mf paper  
C4 - .0001 mf mica

C5 - .005 mf paper  
C6 - .005 mf paper  
C7 - .0001 mf mica  
C8 - 10mf tub. elec.  
C9 - .25mf paper

C10 - .1 mf  
R1 - .05 meg.  
R2 - .05 meg.  
R3 - 2 meg.  
R4 - .5 meg. pot.

R5 - 3 megohm  
R6 - .5 megohm  
R7 - 1.5 megohm  
R8 - 1,200 ohms

INTERMEDIATE FREQ.: 455 Kc.  
Transformer 1,200 ohms.

BATTERIES: 1 - PR 8. 2 PR 45.

SPEAKER: 4" permag.

WELDON C423P (1940)